
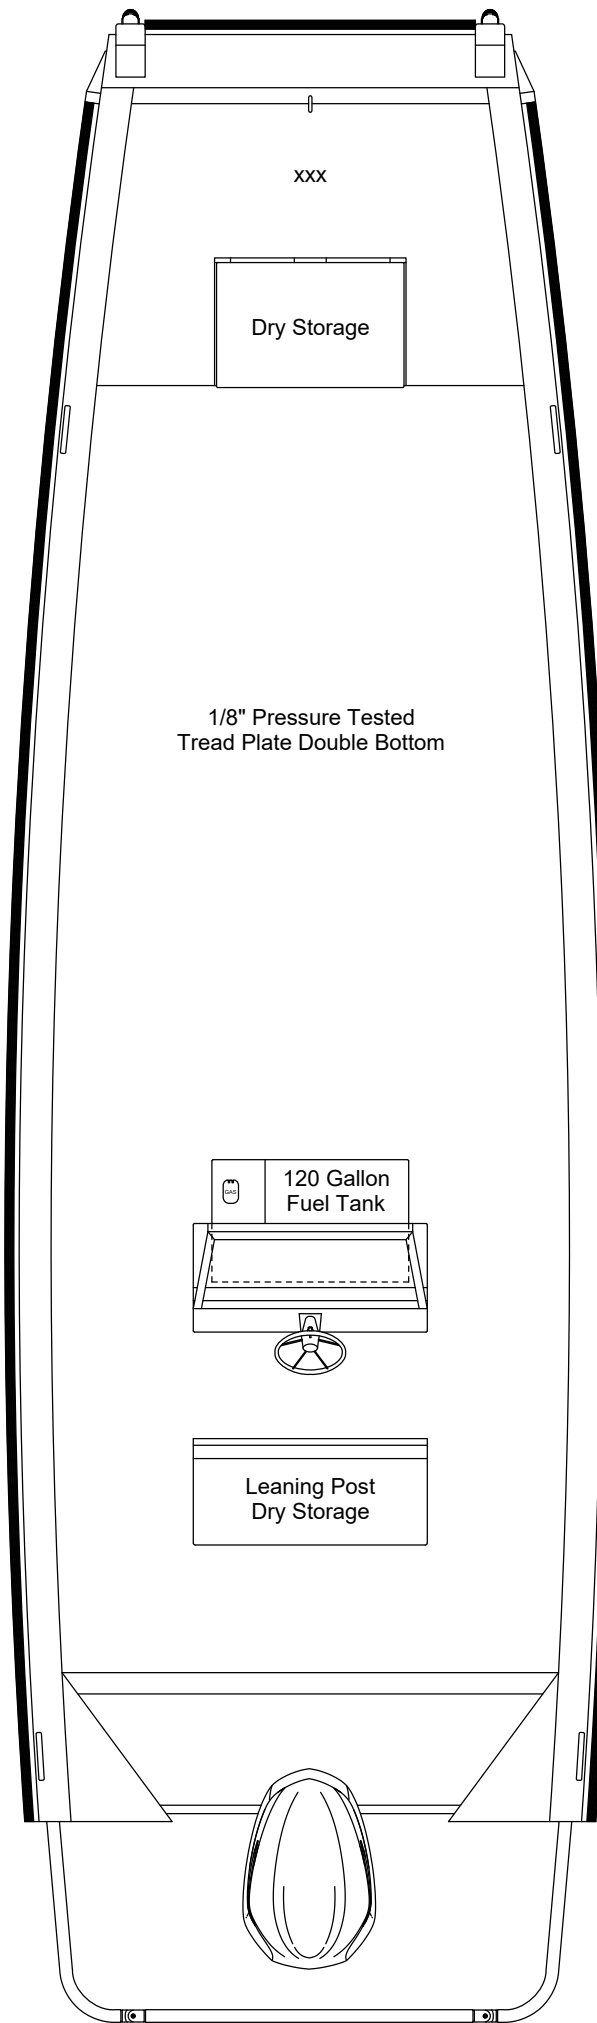


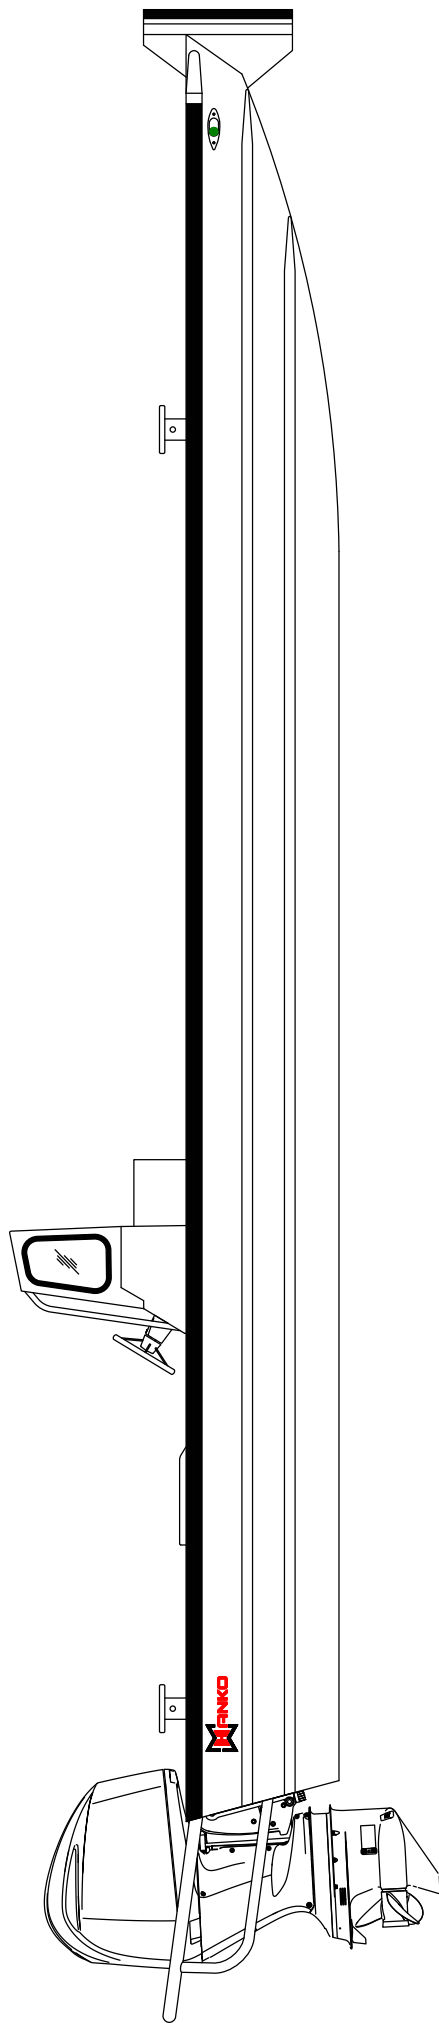

(985) 385-3310

995 Utah Street
Berwick, LA 70342

Model Number:

2884 CCF

1

Specifications

Hull (standard)

- Length Overall (LOA): 28'(not including motor guard)
- Bottom Width: 84"
- Beam: 102"
- Side Height: 28"
- Bottom Thickness: 3/16"
- Side Thickness: 3/16"
- Hull Material: 5086 Marine-Grade Aluminum
- Floor & Decking Material: 1/8" Aluminum Diamond Plate
- Transom Height: 20" - 25"
- Fuel Capacity: 120 Gallons
- Capacity: 6 Persons (814 lbs.)
- Max Load Capacity: 3,000 lbs.

Structural Design (standard)

Longitudinal Structure (Fore-Aft)

- Qty: 4 | 3" x 1-1/8" corrugated bottom runners pressed into hull plating
- Qty: 2 | 3" x 1-1/8" corrugated side runners pressed into side plating
- Qty: 2 | 3" x 2" x 3/16" aluminum angle rails (inside gunnel)
- Qty: 2 | 2" Schedule 40 aluminum half pipe (outside gunnel)

Transverse Structure (Port-Starboard)

- Collision Bulkhead: 3/16", sealed, fully welded, pressure tested
- Floor Supports: 2" x 2" square tubing on 16" centers
- Secondary Bracing: 1" x 1" angle tacked beneath flooring, between each rib section
- Transom Reinforcement: (2) 4" x 1-1/2" channels across inside of transom with vertical gussets

Floor Plan & Layout (standard)

- Front Deck: 5' aluminum tread plate
- Front Storage: Flush-mounted hinged hatch with dry storage
- Console: Center console with integrated shelf
- Seating: Open deck (bench seating optional per package)
- Fuel Tank: Center-mounted aluminum fuel tank
- Floor: Raised floor from console to splashwell
- Custom Lean Post: With dry storage underneath, designed for ice chest to slide underneath
- Tow Post: Heavy-duty tow post attached to rear decking
- Splash Well: Full-width splash well
- Drainage: (2) overboard drains—port and starboard

Transom & Motor Protection (standard)

- Gill Brackets: Full-width tread plate gill brackets designed for (2) - 25" shaft outboards
- Guard Bracing: 1-1/2" gusset pipes
- Motor Clearance: Designed to allow full trim of outboard motor
- Motor Capacity: Rated up to 150 HP

Lifting & Handling (standard)

- Lifting Eyes/Cleats: (4) combination lifting eyes and cleats
- Locations: Port and starboard — bow and stern

Standard Features

Steering & Control

- Steering System: Dual hydraulic steering system, dual cylinder with tie bar
- Steering Wheel: Included

Lighting & Visibility

- Navigation Lights: Front flush-mounted lights
- All-Around Light: White 360-degree light

Bilge & Drainage

- Bilge Pump: (x2) 1,100 GPH automatic bilge pumps
- Control: Manual override switch on dash

Fuel System

- Fuel Tank: 120-gallon aluminum fuel tank
- Tank Location: Center-mounted
- Fuel System: Fittings, valves, hoses, and fuel-water separator

Electrical & Power

- Power Outlet: 12V USB socket
- Battery: Marine cranking batteries
- Battery Installation: Battery cases and holding straps
- Wiring Protection: All wiring encased in plastic split loom

Corrosion Protection & Hardware

- Anode: Installed ion transom
- Fasteners: Stainless steel fasteners throughout

Fit, Finish & Protection

- Dry Storage Seals: Gaskets on front dry box
- Edge Protection: Trim gaskets on all raw edges



(985) 385-3310
995 Utah Street
Berwick, LA 70342

Model Number:

2884 CCF

2

Options & Upgrades

Commercial Work Package

Push Knees

- Type: Heavy-duty D-Rubber
- Size: 3"
- Location: Bow—port and starboard
- Purpose: Docking, pushing, and workboat contact protection

Side Rubber Rails

- Type: Heavy-duty D-rubber
- Size: 3"
- Coverage: Full outside gunnel—bow to stern
- Purpose: Hull protection during docking and commercial use

6" Wide Rails (catwalk)

- Rail Width: 6"
- Construction: 2" x 3/8" interior flat bar
- Reinforcement: Heavy-duty gusset plates to side wall
- Purpose: Walkable catwalk providing secure footing for crew movement

Upgrades

Fuel Tank Options

- Front Step-Style Fuel Tank: Aluminum tank located behind front deck
- Center Console Fuel Tank: 120 gallons
- Fuel Gauge/Switch: Fuel sender and dash-mounted gauge and selector switch

Aluminum T-Top

- Available on **Commercial Center Console** models only

Flotation & Safety

- Saddle Flotation Pods: Improves flotation and stern lift; eliminates motor guard
- Level Flotation: Internal foam flotation installed from bow to stern

Windshield

- Low-Profile Windshield: 1/4" Plexiglass with integrated 1" Schedule 40 aluminum grab rail

Steering

- Dual Hydraulic Steering System
- Stainless Steel Steering Wheel

Lighting

- 10" Bow-Mounted LED Light Bar: Bow pocket integrated
- 20" Bow-Mounted LED Light Bar: Bow pocket integrated
- High-Powered LED Flood Lights: Installed on side pockets of hull, port and starboard
- LED Courtesy Lights: Under the side wall gunnels

Electrical

- 4-Gang Switch Panel: Blue Sea Systems with Perko on/off switch
- 6-Gang Switch Panel: Blue Sea Systems with Perko on/off switch
- 8-Gang Switch Panel: Blue Sea Systems with Perko on/off switch

Communications

- VHF Radio Package: Standard Horizon VHF with 3' antenna

Sound System

- System options to be discussed with your sales rep.

Electronics (GPS/Sonar)

- GPS/Sonar Combo: Garmin 5", 6", or 7" display
- Transducer: External transducer
- Console Integration: Flush-mounted GPS in console

Horn

- Console-Mounted Horn: Flush-mounted into the console
- Electric trumpet-style horn

Seating & Comfort

- Driver Seat: Folding seat with removable pedestal
- Passenger Seat: Folding seat with removable pedestal
- Bench Seat Cushion: 2" foam with marine vinyl cover (medium gray)

Paint

- Color options to be discussed with sales rep

Decking

- EVA Foam Decking
- Spray Liner



(985) 385-3310
995 Utah Street
Berwick, LA 70342

Model Number:

2884 CCF

2

Options & Upgrades (continued)

Power Packages (motors)

Brands

- Honda
- Mercury
- Suzuki

Horsepower

- 90 HP • 135 HP
- 100 HP • 140 HP
- 115 HP • 150 HP

Trailer

Galvanized Trailer Package

- Manufacturer: MagicTilt
- Type: Tandem-axle
- Capacity: 8,600 lbs.
- Tires: 15"
- Side Guides: Heavy-duty
- Bunks: (4) plastic-covered drive-on boards
- Lighting: LED
- Spare: Spare tire with carrier
- Setup: Adjusted and fitted for selected boat